


GJXZY-LF

Application:

The products are low friction and easy for installation, especially suit for equipment communication and indoor access network.

Cable Structure:

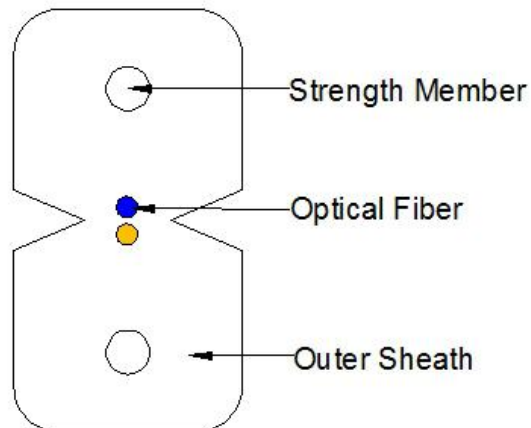

Standard Reference:

RoHS , YDT 1997-2009

Transmission performance:

Fiber Type	G657	G652
	(1310/1550nm)	(1310/1550nm)
Max. Attenuation(dB/km)	0.8/0.6	0.8/0.6
Typical. Attenuation(dB/km)	0.4/0.3	0.4/0.3

* Other type of optical fiber can be used according to customer's requirements.

Cable Parameters:

Fiber core	Tension(N)		Crush(N/100mm)		Min. Bending Radius(mm)		Dia. (mm)	Weight (kg/km)
	Short /	Long	Short /	Long	Dynamic /	Static		
1,2	200	100	2200	1000	30	15	2.0*1.6	7
1,2	80	40	1000	500	30	15	2.0*1.6	6

* The cable parameters are typical values and should be adjusted according to the actual situation.

** The cable can be designed according to customer's requirements.