


GJX(F)H

Application:

The products are especially equipment communication and indoor access network. The Invisible cable can easily solve the problem that the customer wants to keep the layout beautiful and easy for installation. It can be extended to any corner of the interior and does not need to wear pipe laying. It is not only beautiful, but also can quickly and easily be installed and minimally disturb the household.

Cable Structure:

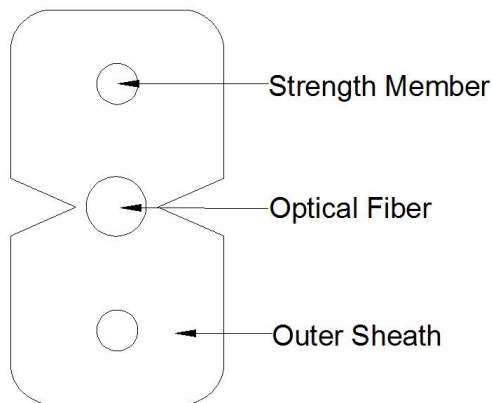

Standard Reference:

RoHS , YDT 1997-2009, ITU-G657

Transmission performance:

Fiber Type	G657 (1310/1550nm)
Max. Attenuation(dB/km)	0.8/0.6
Typical. Attenuation(dB/km)	0.4/0.3

* Other type of optical fiber can be used according to customer's requirements.

Cable Parameters:

Type	Tension(N)		Crush(N/100mm)		Min. Bending Radius(mm)		Dia. (mm)	Weight (kg/km)
	Short /	Long	Short /	Long	Cable /	Fiber		
GJXJH-1B6	200	100	2200	1000	15	5	3.0*2.0	11
GJXFJH-1B6	80	40	1000	500	15	5	3.0*2.0	10

* The cable parameters are typical values and should be adjusted according to the actual situation.

** The cable can be designed according to customer's requirements.