

## Easy Type Suspension Set


### Application:

ADSS cable suspension clamp is used to connect all dielectric self-support cables (ADSS) to straight line towers. Dynamic stress of wind vibration can be suppressed by the product to improve optical vibration resistance. The product may also ensure that the bending of cable does not exceed the allowable value, so as to prevent the optical fiber from generating attachment loss.

### Product Picture:



Helical armour rod

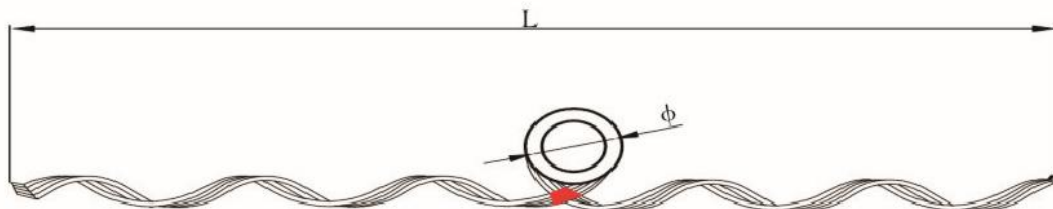

### Product Description:

The applicable maximum installation span is 50 meters.

### Parameters:

No.	Applicable cable diameter(mm)	Applicable span(m)	Product weight(kg)
1	10.6-11.6	≤75	0.25
2	11.7-12.8	≤75	0.25
3	12.9-14.1	≤75	0.25
4	14.2-15.6	≤75	0.25
5	15.7-17.3	≤75	0.25
6	17.4-19.1	≤75	0.25

\* Other type of tension set can be designed according to customer's requirements.