


Tension Set for Short Span

Application:

The Tension set is used to connect towers and cable in erection of cable line. The specially designed helical armour rod may ensure proper grip strength and protect optical fiber of cable from squeezing damage, ensuring that the fiber signal transmission will not decay.

Product Picture:

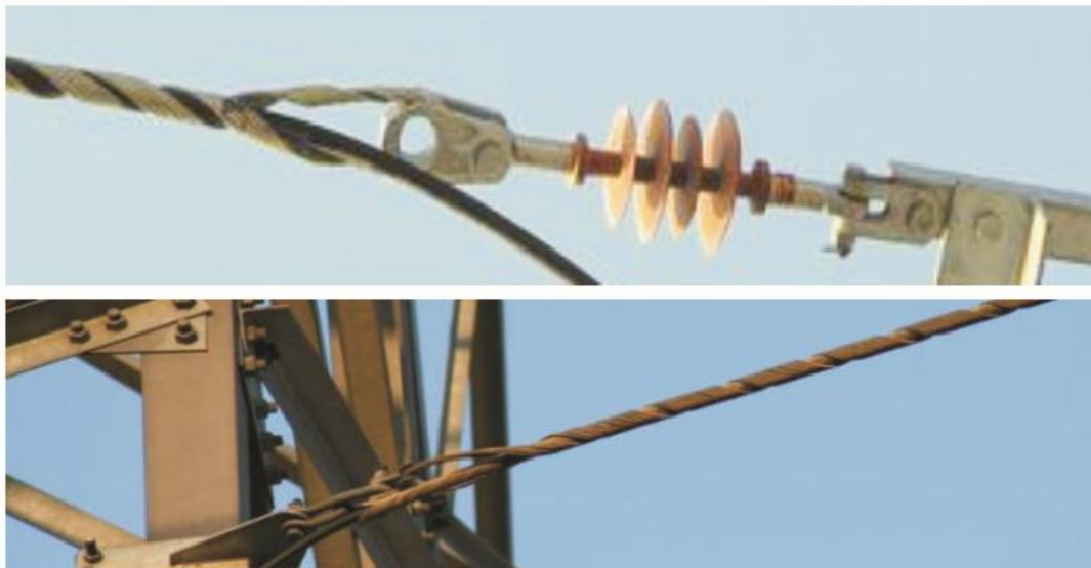

Parameters:

No.	Applicable cable diameter(mm)	Reference length of the product(mm)	Grip strength(KN)	Product weight(kg)
1	9.0-9.4	780	10	0.32
2	9.5-10.4	830	10	0.40
3	10.5-11.5	880	10	0.52
4	11.6-12.4	910	10	0.54
5	12.5-13.4	980	10	0.69
6	13.5-14.9	1020	10	0.79
7	15.0-15.9	1060	10	0.82

* Other type of tension set can be designed according to customer's requirements.